



DEPOWDER

Non-stick for over-spray


FEATURES

Specific product with '**blocking effect**'

able to capture and hold on the ground the over-spray formed during the painting operations. Its use therefore allows to remove from the environment the particles of paint and dust that can be deposited on the surfaces of the pieces in painting, which create the undesired '**anti-coating**' effect.

The particles captured on the ground remain, due to the electrostatic effect, stable and are not reclaimed for the walk of personnel, for the use of spray guns or by pressurization. **DEPOWDER** is completely free of silicone derivatives, chlorinated solvents, has no corrosive effects on metals and plastics of any kind and meets the requirements of the legislation on safety for work (**Legislative Decree 626/94**).

The product is recommended in **body shops, carpenters, restorers and in any case in painting in general.**

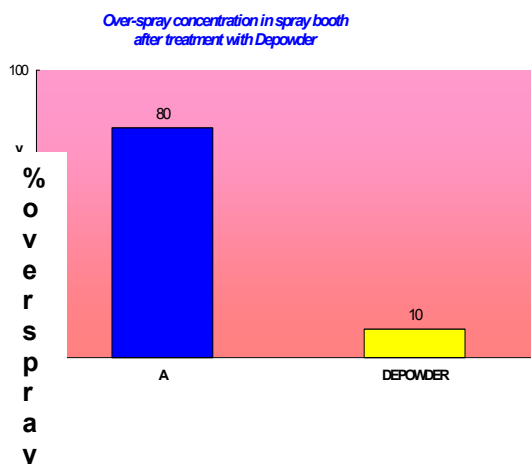

HOW TO USE

Prepare an aqueous solution with 25% of product (250 g / liter); spray it finely on the cabin floor in order to create a thin film at least five minutes before starting the operation. In bodywork it is also advisable to treat the surface in front of the entrance of the same cabin for about two meters.

WARNING: before application, it is advisable to turn off all the open flames and cigarettes.

CHEMICAL/PHYSICAL DATA

Physical state	: liquid
Density _(20°C)	: 0,968 Kg/lit
Solub. in water	: total
pH _(sol.1%)	: 7,7